




OPAQ

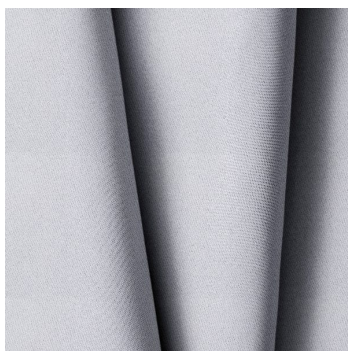


OPAQ
Rosa 10

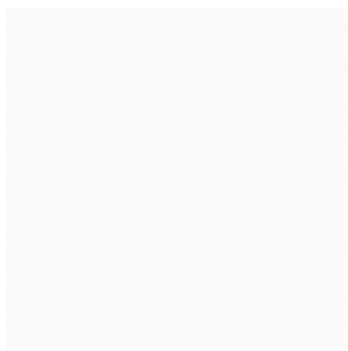


OPAQ
Rosa 81

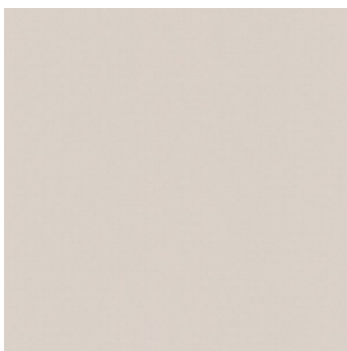


OPAQ
Creme 52

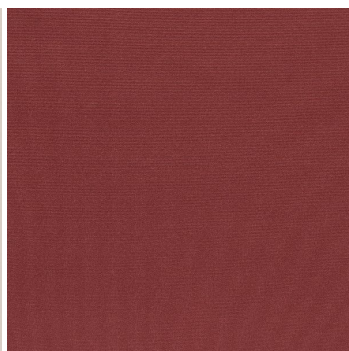


OPAQ
Bordeaux 14




OPAQ
Noir 12

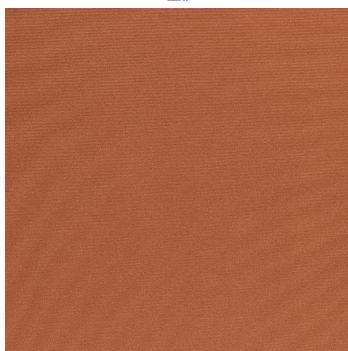


OPAQ
Terre 107

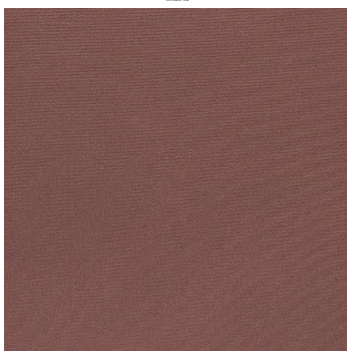


OPAQ
Chêne 111

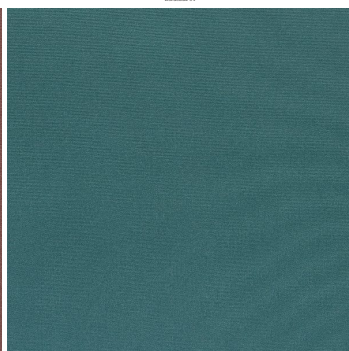


OPAQ
Sage 125

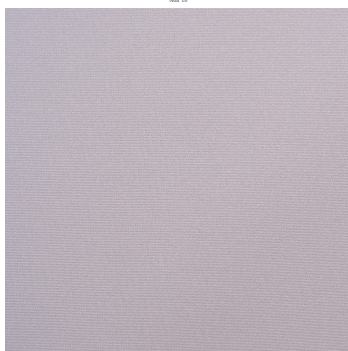


OPAQ
Rosa 128

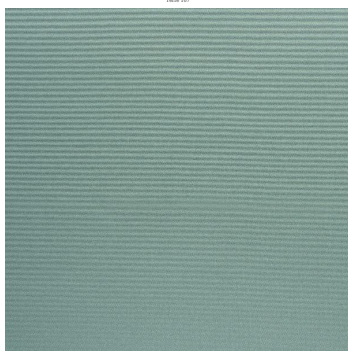


OPAQ
Céleste 135

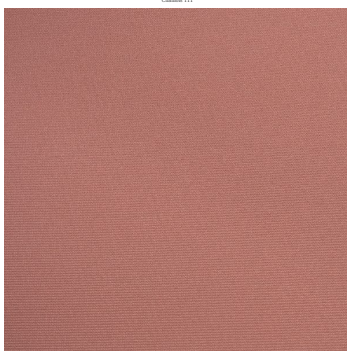


OPAQ
Coral 14

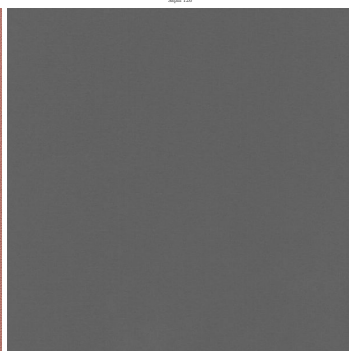


OPAQ
Sécher 20

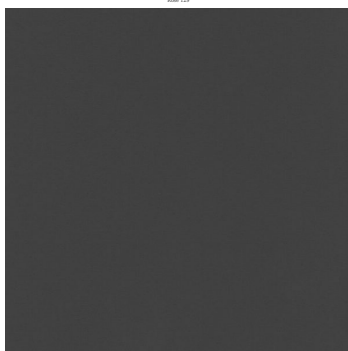


OPAQ
Anthracite 38

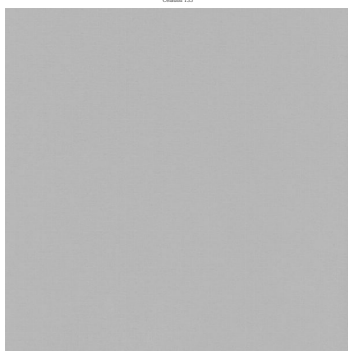


OPAQ
Rosa 81

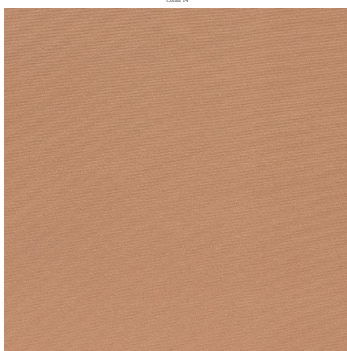


OPAQ
Sable 81

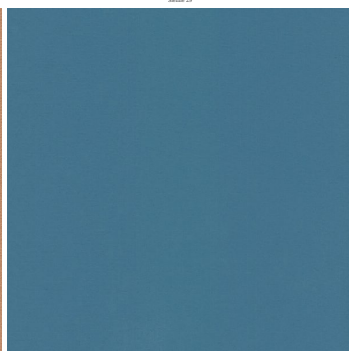


OPAQ
Azur 101

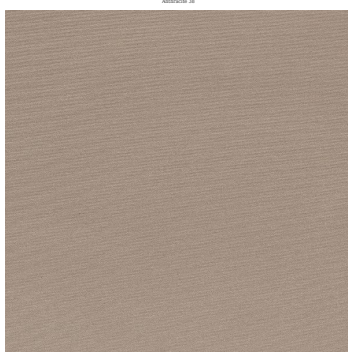


OPAQ
Rosa 11

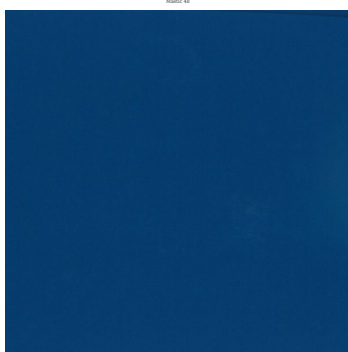

OPAQ
Rosa 11

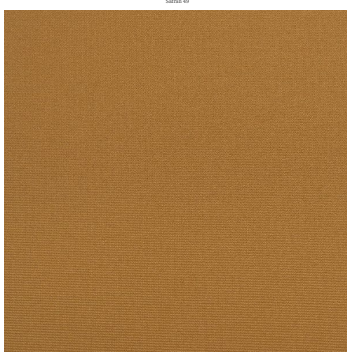


OPAQ
Jaune 14

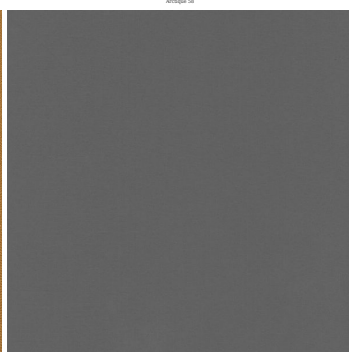

OPAQ
Terre 10



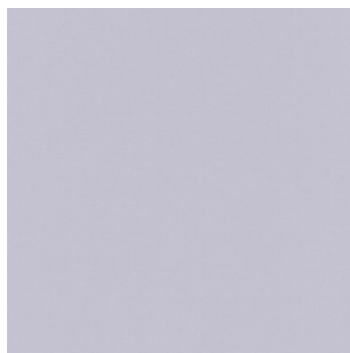

0000
Photo 00





OPAQ
Blanc 01
Support d'impression occultant non classé au feu
Propriétés techniques
Applications Doubleure - Parois japonaises - Rideaux - Store bateau - Store
extérieur
Composition 100% polyester avec envers acrylique floqué blanc
Poids 280 g/m² 784 g/ml **Largeur** 280 cm
Sens Contresens
Conseils d'entretien
Certifications OEKO-TEX STANDARD 100
Minimum commande 25 mètres(s) linéaire(s)

Caractéristiques techniques

Non feu	Non Classé
Résistance	Stabilité dimensionnelle (%)
	Chaîne -0,5
	Trame 0
	Allongement rupture (mm)
	Chaîne 26
	Trame 15
	Résistance rupture (daN)
	Chaîne 62
	Trame 31