



OPAQ




OPAQ
Rosa 10

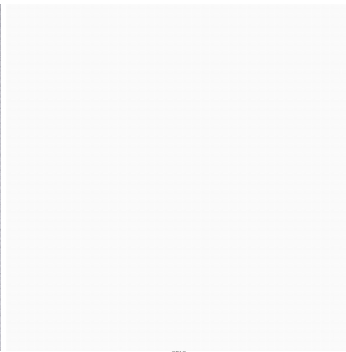


OPAQ
Rosa 81

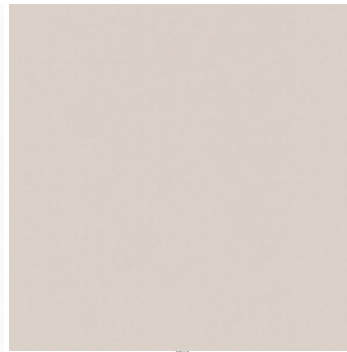


OPAQ
Creme 52

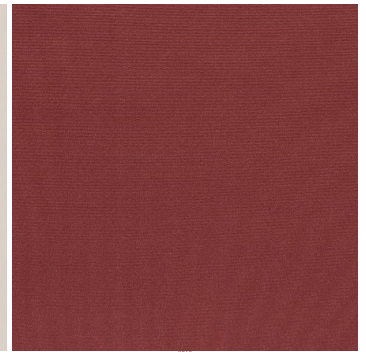


OPAQ
Bordeaux 14



OPAQ
Noir 12

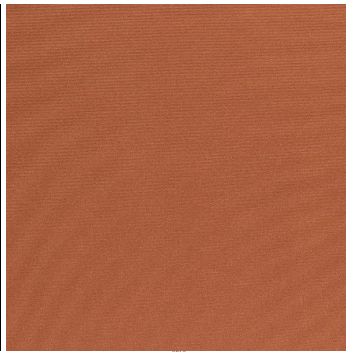


OPAQ
Terre 107

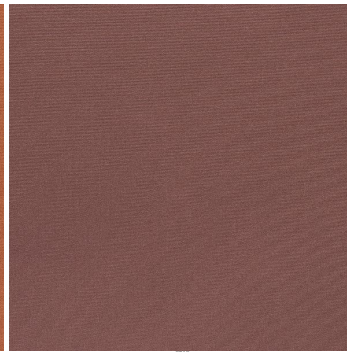


OPAQ
Chêne 111




OPAQ
Sage 125




OPAQ
Rosa 128




OPAQ
Cilada 135




OPAQ
Coral 14

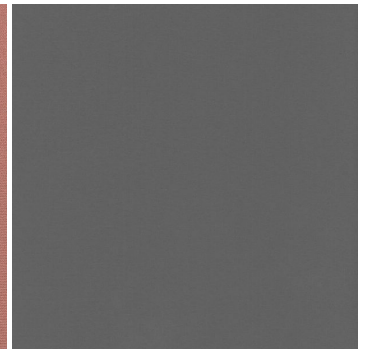


OPAQ
Slate 29

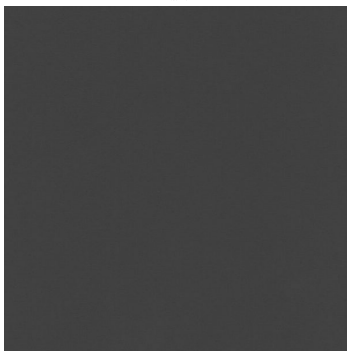


OPAQ
Anthracite 38

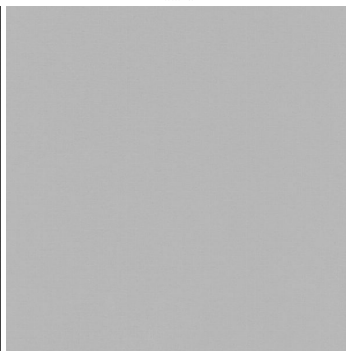


OPAQ
Rosa 49

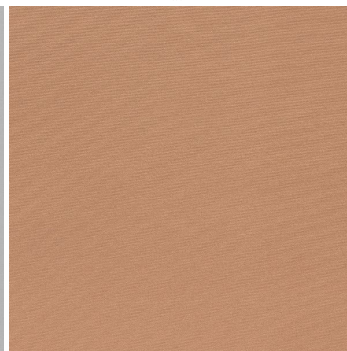


OPAQ
Sable 61

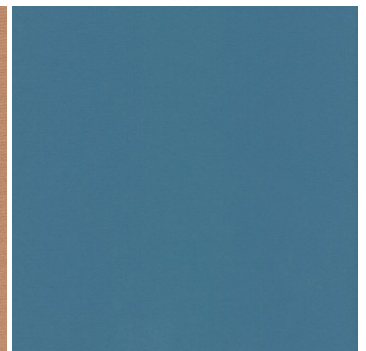


OPAQ
Navy 70

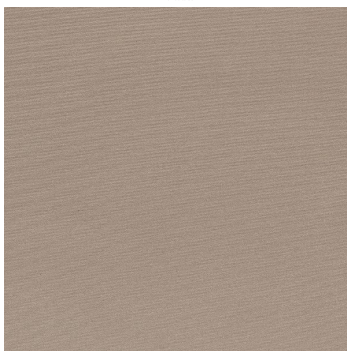


OPAQ
Rosa 11

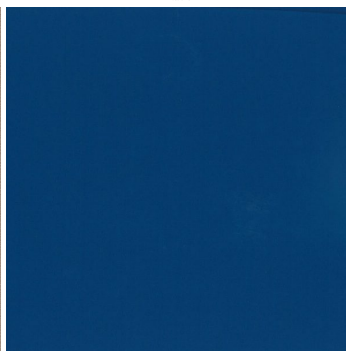

OPAQ
Rosa 51

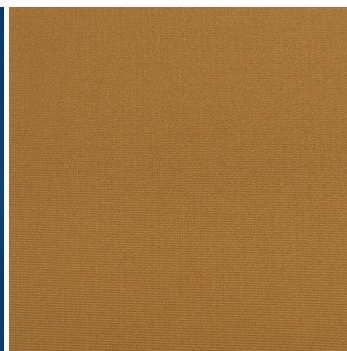


OPAQ
Jaune 34

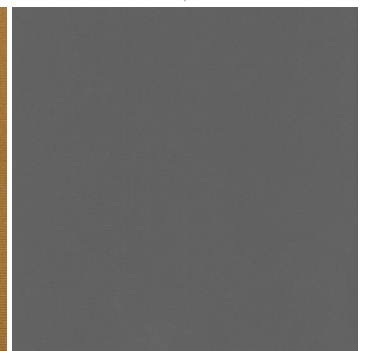


OPAQ
Taupe 55



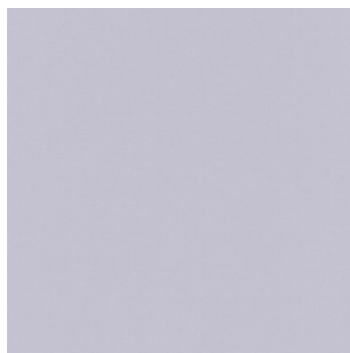

0140
Pavé 100



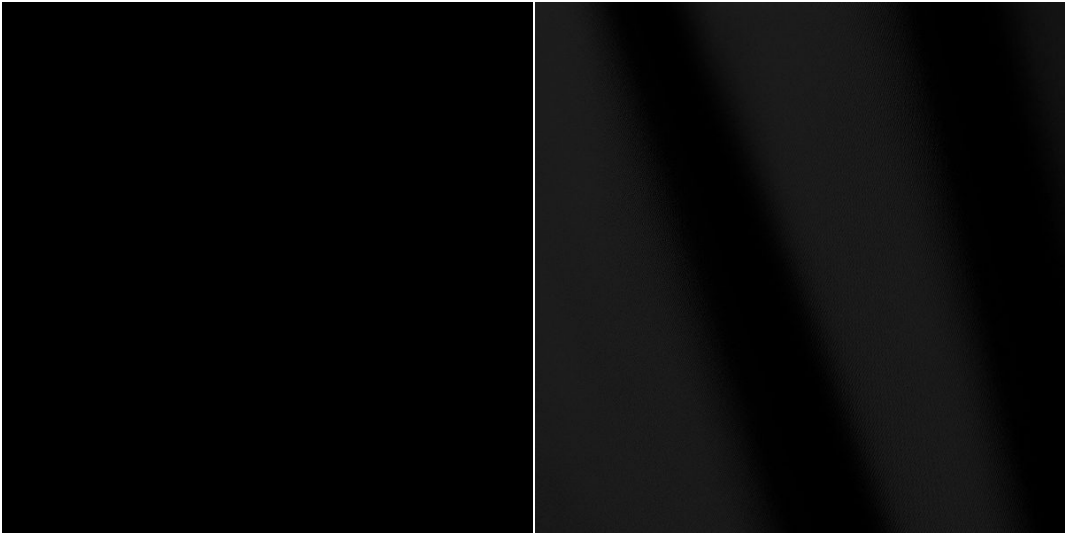

OPAQ
Noir 10
Support d'impression occultant non classé au feu
Propriétés techniques
Applications Doublure - Parois japonaises - Rideaux - Store bateau - Store
caveau
Composition 100% polyester avec envers acrylique floqué blanc
Poids 280 g/m² 784 g/ml **Largeur** 280 cm
Sens Contresens
Conseils d'entretien
Certifications OEKO-TEX STANDARD 100
Minimum commande 25 mètres(s) linéaire(s)

Caractéristiques techniques

Non feu	Non Classé	
Résistance	Stabilité dimensionnelle (%)	
	Chaîne	-0,5
	Trame	0
	Allongement rupture (mm)	
	Chaîne	26
	Trame	15
	Résistance rupture (daN)	
	Chaîne	62
	Trame	31