




OPAQ

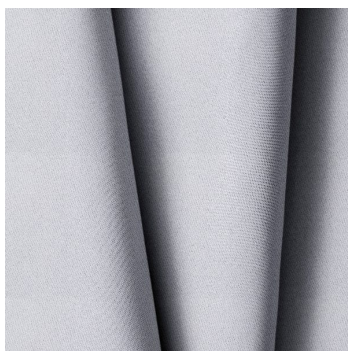


OPAQ
Rosa 10

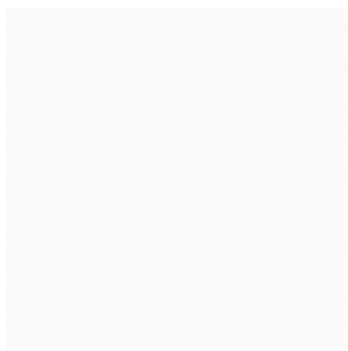


OPAQ
Rosa 81

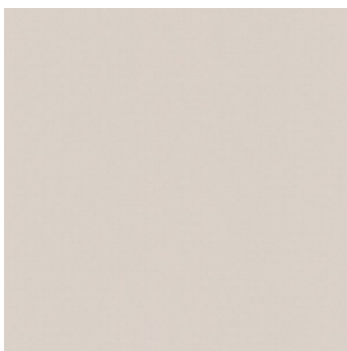


OPAQ
Creme 10

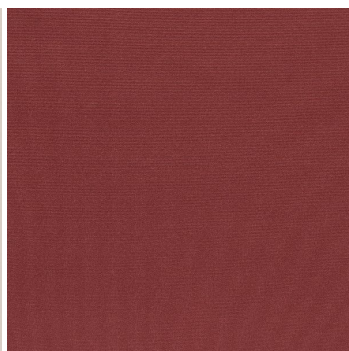


OPAQ
Bordeaux 10




OPAQ
Noir 10

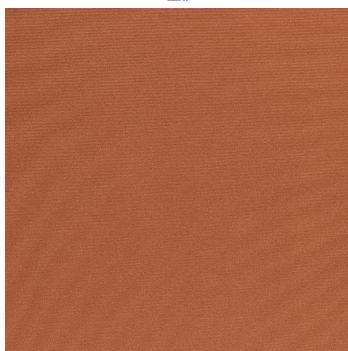


OPAQ
Terre 107

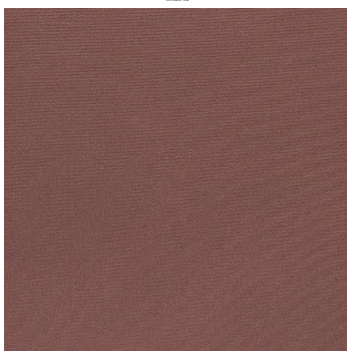


OPAQ
Chêne 111

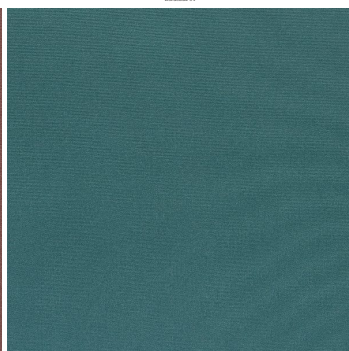


OPAQ
Sage 120

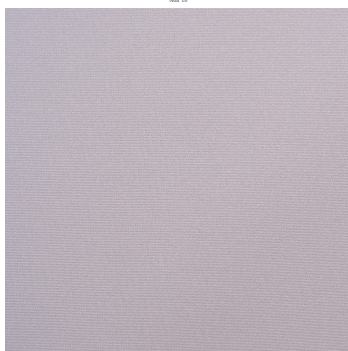


OPAQ
Rosa 128

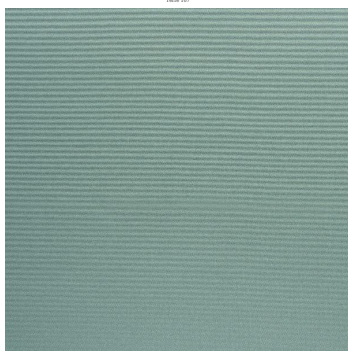


OPAQ
Céleste 135

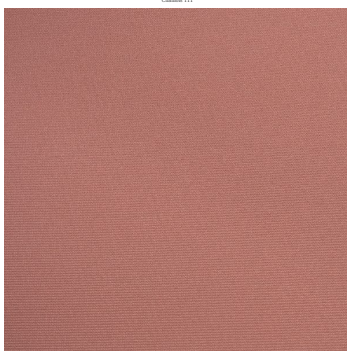


OPAQ
Coral 14

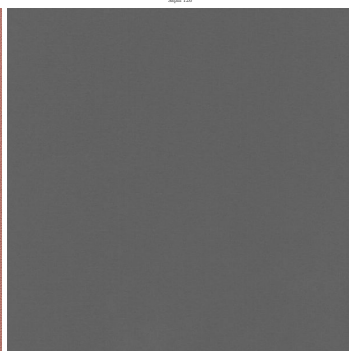


OPAQ
Sécher 20

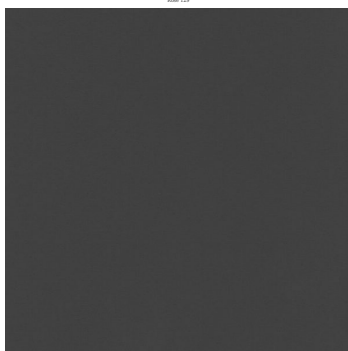


OPAQ
Noir 136

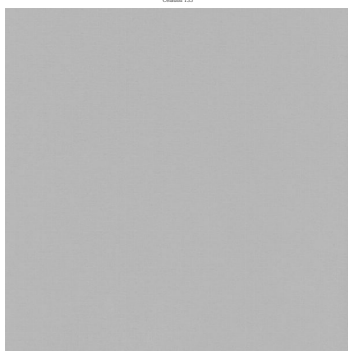


OPAQ
Rosa 81

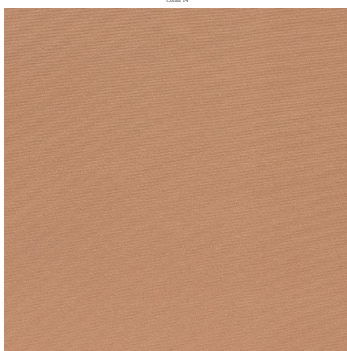


OPAQ
Sable 81

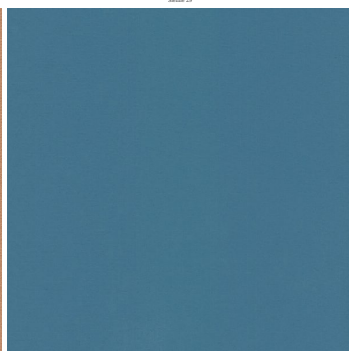


OPAQ
Noir 136

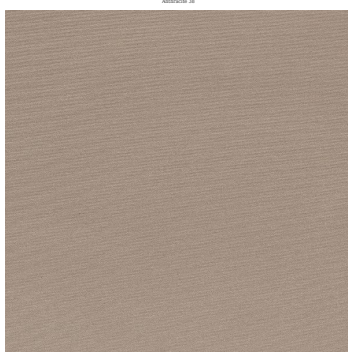


OPAQ
Rosa 10

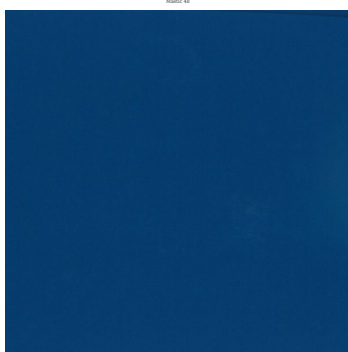

OPAQ
Rosa 10

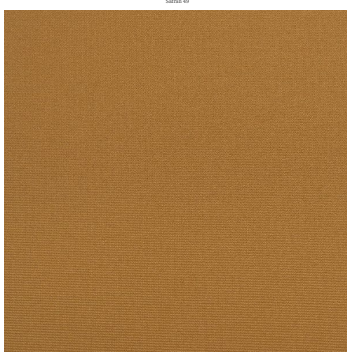


OPAQ
Rosa 10

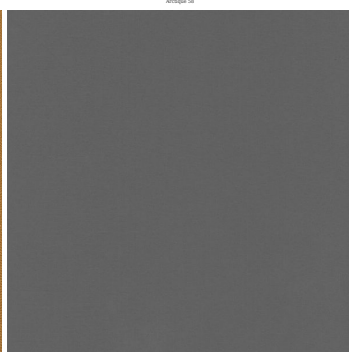


OPAQ
Terre 10



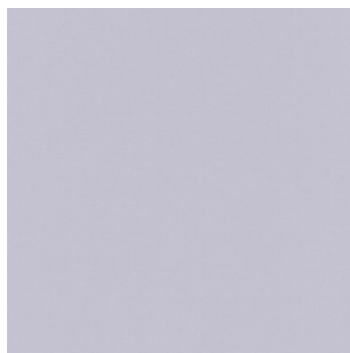

0140
Pavé 100



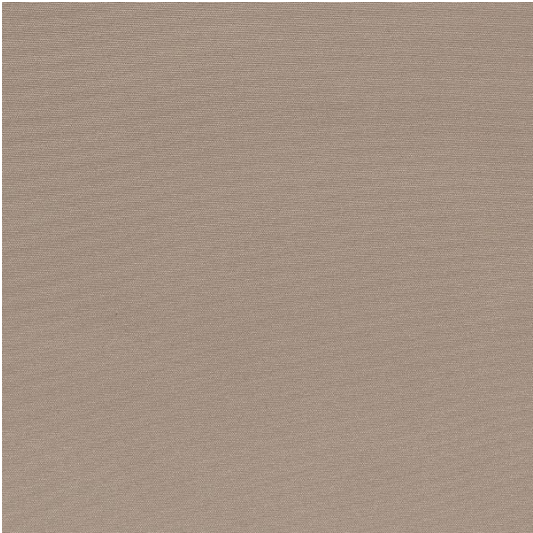

OPAQ
Beige 63
Support d'impression occultant non classé au feu
Propriétés techniques
Applications Doubleure - Papiers japonais - Rideaux - Store bateau - Store
escalier
Composition 100% polyester avec envers acrylique floqué blanc
Poids 280 g/m² 784 g/ml **Largeur** 280 cm
Sens Contresens
Conseils d'entretien      
Certifications OEKO-TEX STANDARD 100
Minimum commande 25 mètres(s) linéaire(s)

Caractéristiques techniques

Non feu	Non Classé	
Résistance	Stabilité dimensionnelle (%)	
	Chaîne	-0,5
	Trame	0
	Allongement rupture (mm)	
	Chaîne	26
	Trame	15
	Résistance rupture (daN)	
	Chaîne	62
	Trame	31